


Control cable Camerakabel CAM-ZX

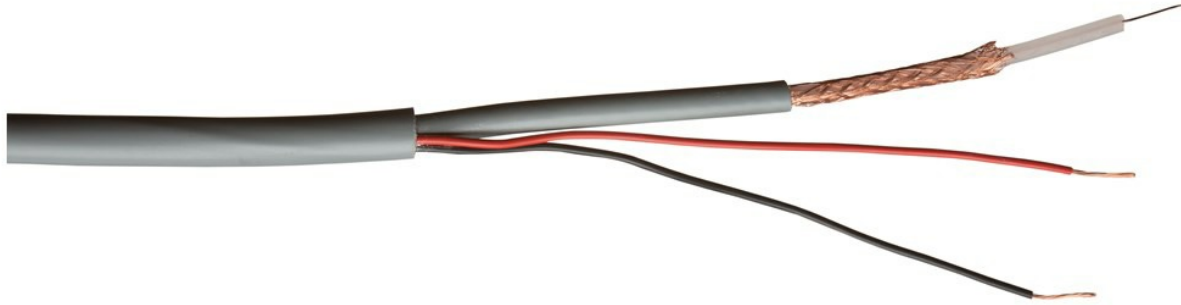

Application	: Halogen free flexible combi cable for use in security systems, such as camera surveillance systems.
TECHNICAL DATA	: 0100106
Remarks	: 2 solid power supply cores + 1 coax 75 Ohm type RG59 solid.
Dimension	: 2 x 0,5
Conductor category	: Class 1 = solid
Stranding element	: No
Conductor material	: Cu, bare
Core insulation	: Copolymer, thermoplastic
Core identification	: Colour
Protective conductor	: No
Inner sheath	: No
Screen over stranding element	: None
Screen over stranding	: None
Material outer sheath	: Polyolefin
Colour outer sheath	: Grey
Halogen free (acc. EN 60754-1/2)	: Yes
Flame retardant	: In accordance with EN 60332-1-2
Low smoke (acc. EN 61034-2)	: No
Low temperature resistant (acc. EN 60811-504+505+506)	: No
Oil resistant (acc. EN 60811-404)	: No
Outer diameter approx.	: 9mm
Permitted cable outer temperature, fixed	: -25°C to 70°C
Nominal voltage U	: 250V
Bending radius	: 135mm
Core protecton	: No