




JOBARCO

Power cable < 1 kV, for flexible applications Camerakabel CAM-ZX

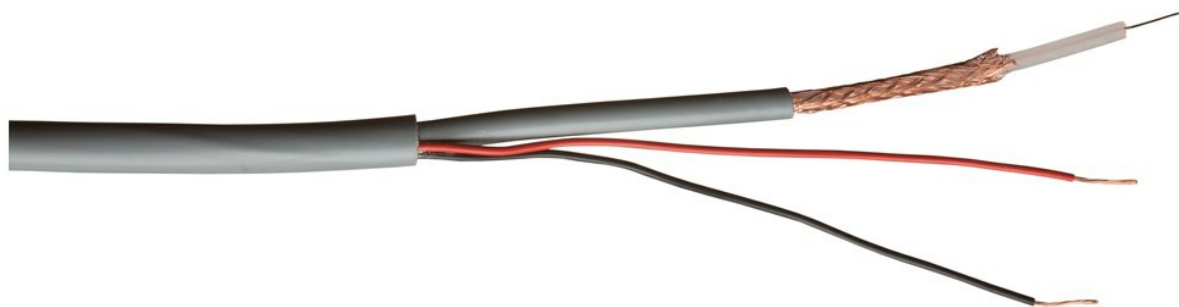

Application	: Halogen free flexible combi cable for use in security systems, such as camera surveillance systems.
TECHNICAL DATA	: 0100106
Remarks	: 2 solid power supply cores + 1 coax 75 Ohm type RG59 solid.
Dimension	: 2 x 0.5 + 1 x 0.6
Conductor material	: Copper, bare
	: 1
Stranding element	: No
Conductor category	: Class 1 = solid
Core insulation material	: Copolymer, thermoplastic
Protective conductor	: No
Core identification	: Colour
Suspension element	: None
Inner sheath	: No
Screen over stranding element	: None
Screen	: No
Screen over stranding	: None
Model	: Round
Colour outer sheath	: Grey
Material outer sheath	: Polyolefin
Flame retardant	: In accordance with EN 60332-1-2
Torsion resistant	: No
Halogen free (acc. EN 60754-1/2)	: Yes
Oil resistant (acc. EN 60811-404)	: No
Low smoke (acc. BS EN 61034-2)	: No
Low temperature resistant (acc. EN 60811-504+505+506)	: No
Outer diameter approx.	: 9mm
Permitted cable outer temperature after assembling without vibration	: -25°C to 70°C
Max. conductor temperature	: 70°C
Bending radius	: 135mm
Nominal voltage U0	: 25V
Core protecton	: No
Nominal voltage U	: 250V
Conductor surface	: Bare
	: 37.1Ohm/km



JOBARCO

Specification core insulation	: Other
	: No
Specification material outer sheath	: Other
	: Round
Shape of conductor	: Round