


## Control cable EQ-flex CC-JB

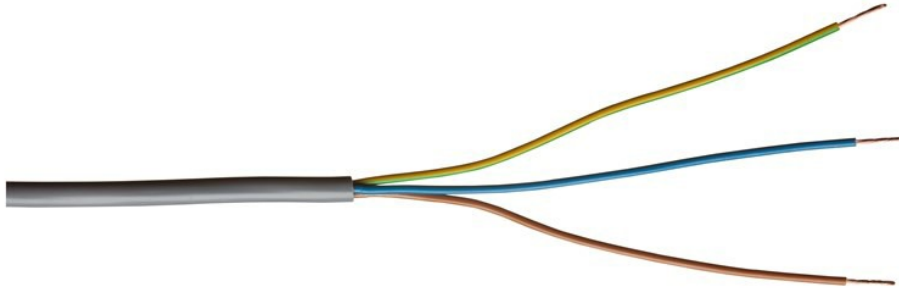

**Application** : For flexible use in industrial environments, machine manufacturing, process control systems.

**TECHNICAL DATA** : TYPE CC-JB

**Remarks** : Oil resistant according to EN 50290-2-22 (TM54).

Conductor category	: Class 5 = flexible
Stranding element	: No
Conductor material	: Cu, bare
Core insulation	: PVC
Core identification	: Colour
Protective conductor	: Yes
Inner sheath	: No
Screen over stranding element	: None
Screen over stranding	: None
Material outer sheath	: PVC
Colour outer sheath	: Grey
Halogen free (acc. EN 60754-1/2)	: No
Flame retardant	: In accordance with EN 60332-1-2
Low smoke (acc. EN 61034-2)	: No
Low temperature resistant (acc. EN 60811-504+505+506)	: No
Oil resistant (acc. EN 60811-404)	: Yes
Permitted cable outer temperature, in movement	: -5°C to 70°C
Permitted cable outer temperature, fixed	: -30°C to 70°C
Nominal voltage U	: 500V
Core protecton	: No
Euro fire class acc. to EN 13501-6	: Eca

ProductNr	Dimension	Outer diameter approx. (mm)
1004320	4 x 0,5	5.7
1004315	3 x 0,75	5.7
1015404	4 x 0,75	6.2
1004302	5 x 0,75	6.8
1004306	3 x 1	6.1
1004310	5 x 1	7.6
1004313	3 x 1,5	6.9
1004307	4 x 1,5	7.5
1004311	5 x 1,5	8.4
1004319	3 x 2,5	8.5